


FFC CONNECTOR PITCH=0.5MM ZIP RIGHT ANGLE UPPER CONTACT (SMT)

SPECIFICATIONS

VOLTAGE RATING: 125V AC/DC
 CURRENT RATING: 1A AC/DC
 WITHSTANDING VOLTAGE: 500V AC/MINUTE
 INSULATION RESISTANCE: 100M OHM MIN
 TEMPERATURE RANGE: -20C TO 85C
 CONTACT RESISTANCE: 20m OHM max

MATERIAL

CONTACT: PHOSPHOR BRONZE, TIN PLATED
 BASE: PPS UL94V-0

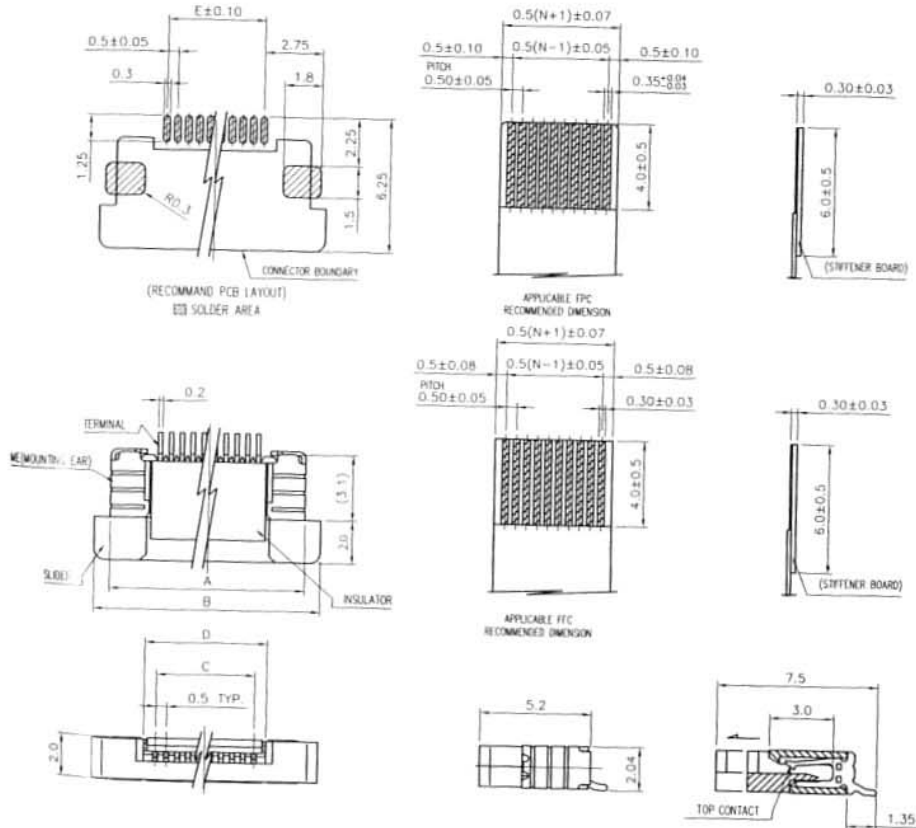

Poles	Dimensions (mm)				
	A	B	C	D	E
4	6.00	7.50	1.50	2.62	1.50
5	6.50	8.00	2.00	3.12	2.00
6	7.00	8.50	2.50	3.62	2.50
7	7.50	9.00	3.00	4.12	3.00
8	8.00	9.50	3.50	4.62	3.50
9	8.50	10.00	4.00	5.12	4.00
10	9.00	10.50	4.50	5.62	4.50
11	9.50	11.00	5.00	6.12	5.00
12	10.00	11.50	5.50	6.62	5.50
13	10.50	12.00	6.00	7.12	6.00
14	11.00	12.50	6.50	7.62	6.50
15	11.50	13.00	7.00	8.12	7.00
16	12.00	13.50	7.50	8.62	7.50
17	12.50	14.00	8.00	9.12	8.00
18	13.00	14.50	8.50	9.62	8.50
19	13.50	15.00	9.00	10.12	9.00
20	14.00	15.50	9.50	10.62	9.50

DRAWN BY	DESIGNED BY	UNIT	SCALE	TOLERANCE
		mm		+/- 0.2MM
CHECKED BY	APPROVED BY	DATE	VER NO.	
		25 MAR 04		
OWL ELECTRONICS LIMITED				PART NO.
				FF 8066-RU