



PIN HEADER PITCH=2.54MM DOUBLE ROW

DOUBLE ROW
STRAIGHT
PH 3002S-

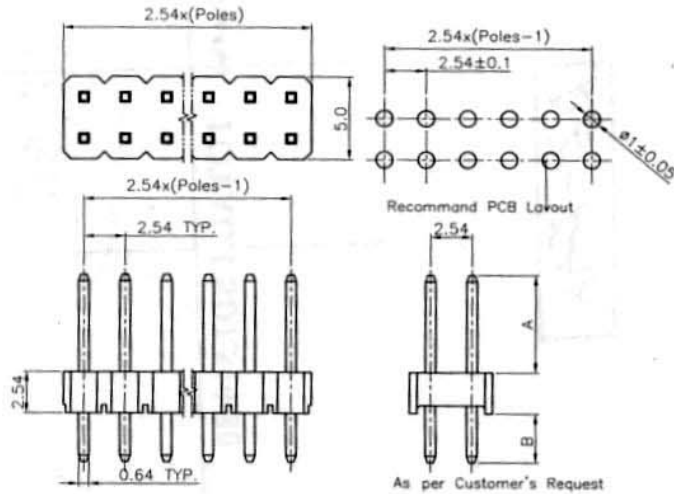

DOUBLE ROW
RIGHT ANGLE
PH 3002R-

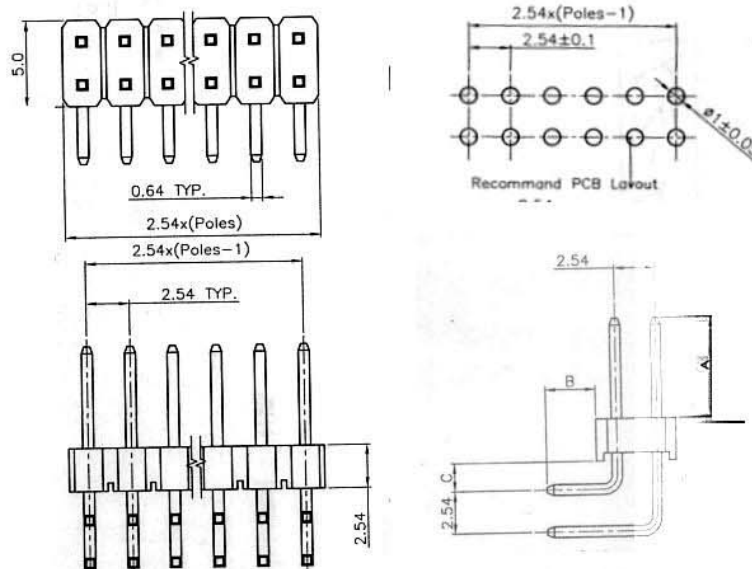

SPECIFICATIONS

VOLTAGE RATING: 250V AC/DC
CURRENT RATING: 3A AC/DC
WITHSTANDING VOLTAGE: 1000V AC/MINUTES
INSULATION RESISTANCE: 1000M OHM MIN
TEMPERATURE RANGE: -25C TO + 85C
CONTACT RESISTANCE: 20m OHM MAX

MATERIAL

CONTACT: BRASS, GOLD PLATED
BASE: PBT UL94V-0

PIN HEADER PITCH=2.54MM DOUBLE ROW

DRAWN BY	DESIGNED BY	UNIT	SCALE	TOLERANCE
		mm		+/- 0.2MM
CHECKED BY	APPROVED BY	DATE	VER NO.	
		25 MAR 04		
OWL ELECTRONICS LIMITED				PART NO.
				PH 3002S- PH 3002R-