



**DOUBLE ROW
STRAIGHT
PH 4002S-**

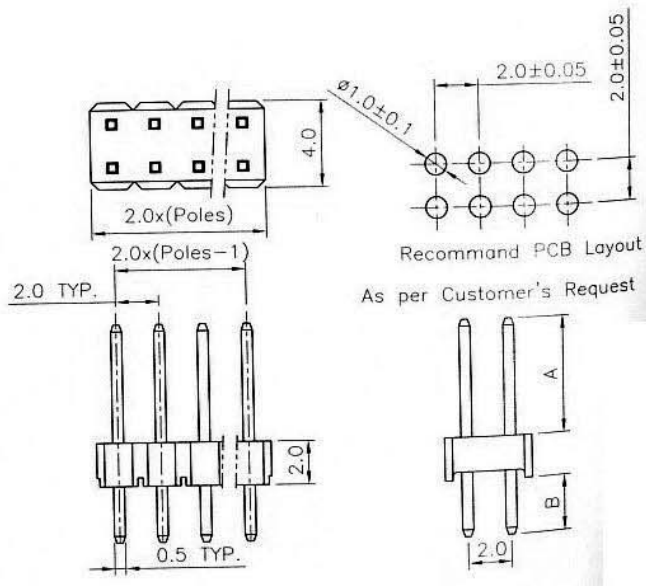

**DOUBLE ROW
RIGHT ANGLE
PH 4002R-**

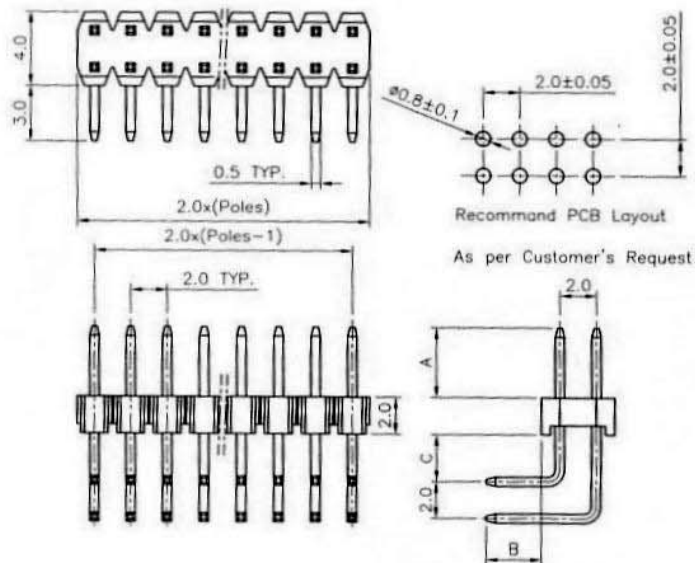

SPECIFICATIONS

VOLTAGE RATING: 250V AC/DC
 CURRENT RATING: 3A AC/DC
 WITHSTANDING VOLTAGE: 1000V AC/MINUTES
 INSULATION RESISTANCE: 1000M OHM MIN
 TEMPERATURE RANGE: -25C TO + 85C
 CONTACT RESISTANCE: 20m OHM MAX

MATERIAL

CONTACT: BRASS, GOLD PLATED
 BASE: PBT UL94V-0

PIN HEADER PITCH=2.0MM DOUBLE ROW

DRAWN BY	DESIGNED BY	UNIT	SCALE	TOLERANCE
		mm		+/- 0.2MM
CHECKED BY	APPROVED BY	DATE	VER NO.	
		25 MAR 04		
OWL ELECTRONICS LIMITED				PART NO.
				PH 4002S- PH 4002R-