


PCB SOCKET PITCH=2.54MM DOUBLE ROW

DOUBLE ROW  
STRAIGHT  
PS 2800S-

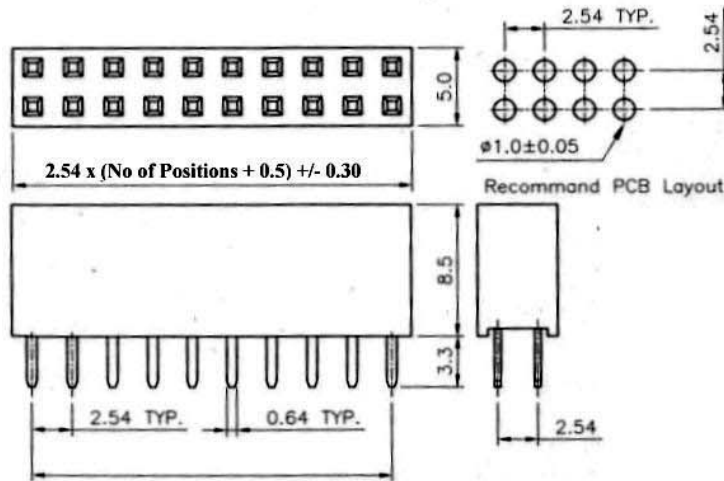


SPECIFICATIONS:

CURRENT RATING: 1A AC/DC  
WITHSTANDING VOLTAGE: 500V AC/MINUTE  
INSULATION RESISTANCE: 5000M OHM MIN  
TEMPERATURE RANGE: -40C TO 105C  
CONTACT RESISTANCE: 20M OHM MAX



MATERIAL

CONTACT: PHOSPHOR BRONZE GOLD PLATED  
BASE: PBT UL94V-0

SMT  
PS 2800V-

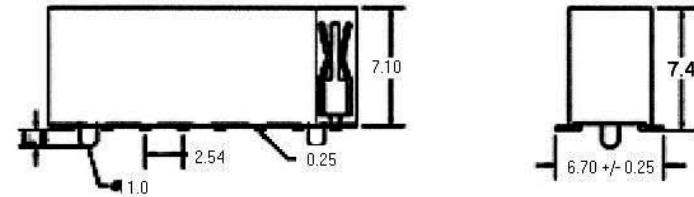

DOUBLE ROW  
RIGHT ANGLE  
PS 2800R-

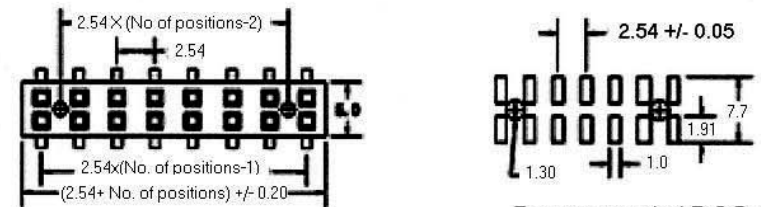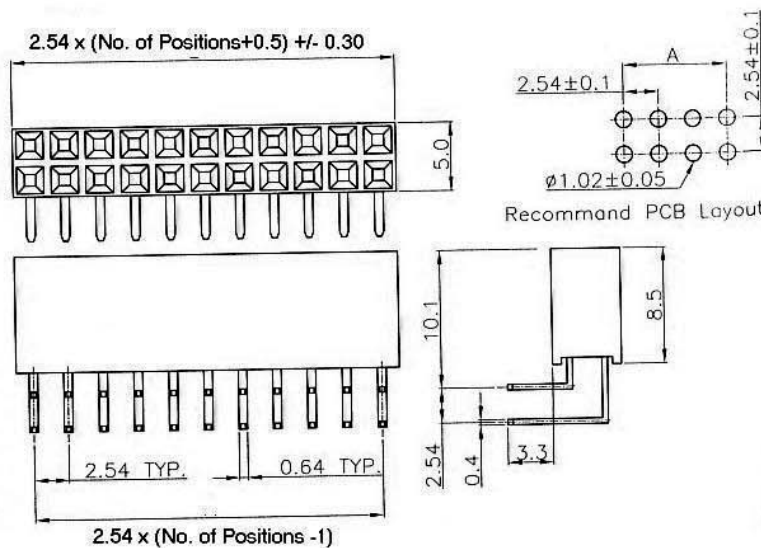

Recommended P.C.B. Layout

DRAWN BY	DESIGNED BY	UNIT	SCALE	TOLERANCE
		mm		+/- 0.2MM
CHECKED BY	APPROVED BY	DATE	VER NO.	
		25 MAR 04		
OWL ELECTRONICS LIMITED				PART NO.
				PS 2800S- PS 2800R- PS 2800V-