


# MINI USB A TYPE FEMALE (SMT) 5 PIN

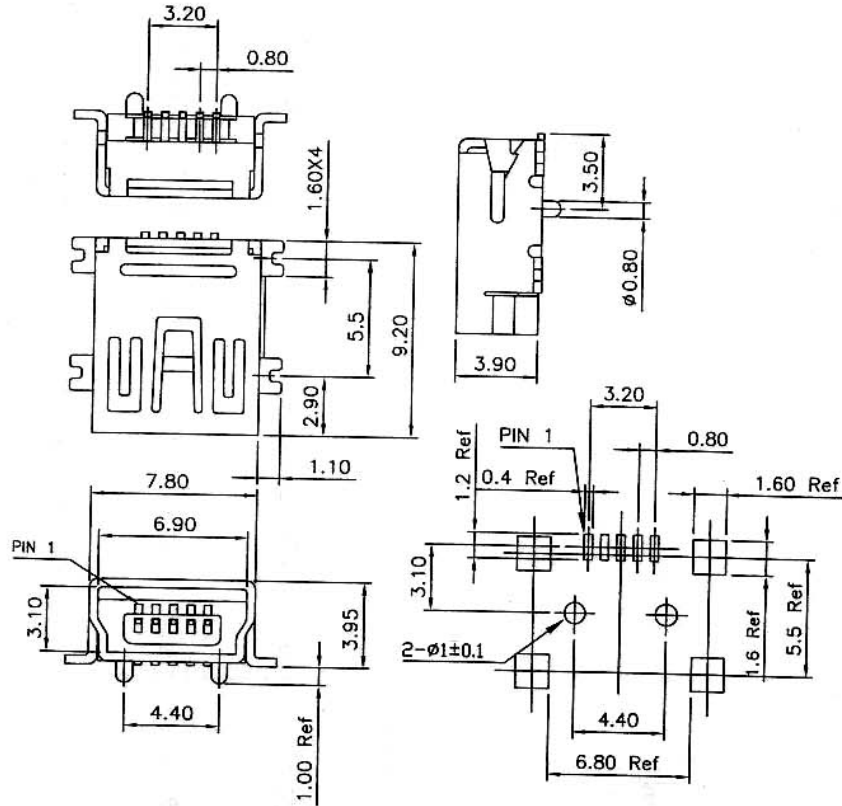

## SPECIFICATIONS:

CURRENT RATING 1A AC/DC  
 WITHDRAWING VOLTAGE 250V AC/MINUTE  
 INSULATION RESISTANCE 500M OHM MIN  
 TEMPERATURE RANGE -55C TO +105C  
 CONTACT RESISTANCE 30m OHM MAX

## MATERIAL

SHELL - BRASS, NICKEL OR TIN PLATED  
 HOUSING - LCP UL94V-0 OR NYLON 9T UL94V-0  
 TERMINAL - PHOSPHOR BRONZE

PACKING  
 1000PCS/BAG

DRAWN BY	DESIGNED BY	UNIT	SCALE	TOLERANCE
		mm		±0.25
CHECKED BY	APPROVED BY	DATE	VER NO.	
		06-20-01	A	
OWL ELECTRONICS LIMITED				PART NO.
				ST 3105AFS-00