


MINI USB B TYPE FEMALE (SMT) 5 PIN

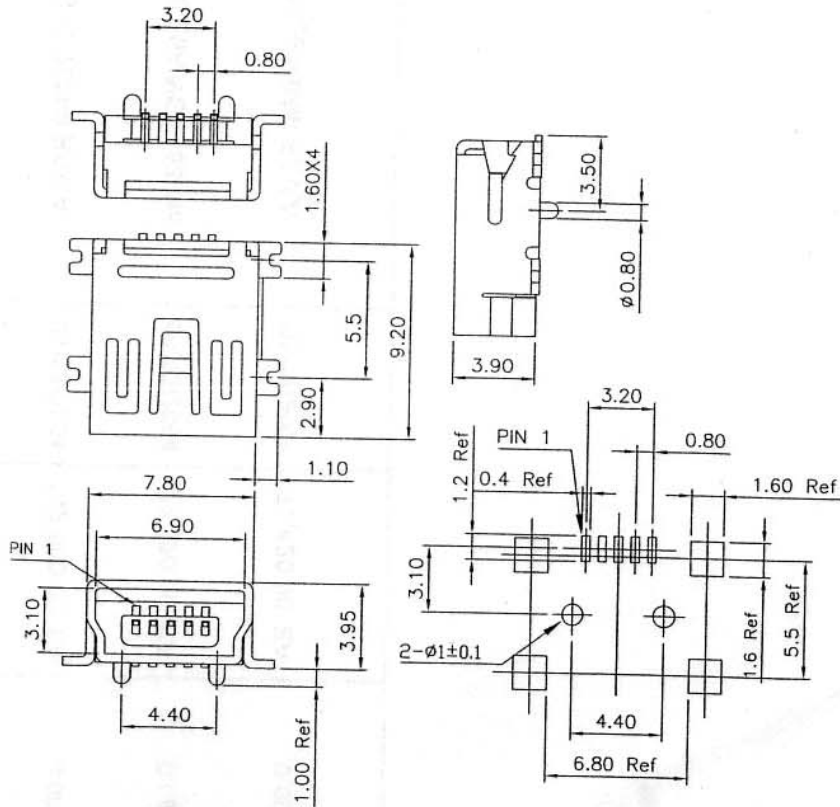

SPECIFICATIONS:

CURRENT RATING 1A AC/DC
 WITHSTANDING VOLTAGE 250V AC/MINUTE
 INSULATION RESISTANCE 500M OHM MIN
 TEMPERATURE RANGE -55C TO +105C
 CONTACT RESISTANCE 30m OHM MAX

MATERIAL

SHELL - BRASS, NICKEL OR TIN PLATED
 HOUSING - LCP UL94V-0
 TERMINAL - PHOSPHOR BRONZE

PACKING
 1000PCS/BAG

DRAWN BY	DESIGNED BY	UNIT	SCALE	TOLERANCE
		mm		±0.25
CHECKED BY	APPROVED BY	DATE	VER NO.	
		06-20-01	A	
OWL ELECTRONICS LIMITED				PART NO.
				ST 3105BFS-00