






USB CONNECTOR A TYPE PLUG AND CRIMPING 4 PIN

SPECIFICATIONS
 CURRENT RATING: 1A AC/DC
 WITHSTANDING VOLTAGE: 500V AC/MINUTE
 INSULATION RESISTANCE: 1000 MOHM/MINUTE
 TEMPERATURE RANGE: -55C TO +105C
 CONTACT RESISTANCE: 30mOHM MAX

FEATURES:
 USB CONNECTOR (4PCS/SET)

MATERIAL:
 METAL LOWER COVER - STEEL, NICKEL PLATED
 METAL UPPER COVER - STEEL, NICKEL PLATED
 TERMINAL - PBT UL 94V-0

PACKING:
 1000PCS/BAG

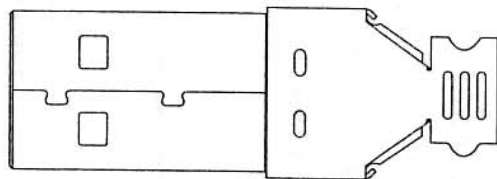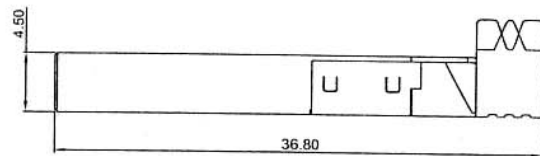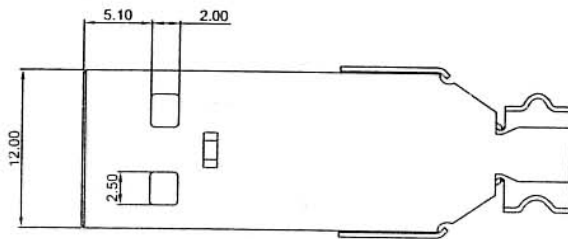

DRAWN BY	DESIGNED BY	UNIT	SCALE	TOLERANCE
		mm		±0.25
CHECKED BY	APPROVED BY	DATE	VER. NO.	
		06-20-01	A	
OWL ELECTRONICS LIMITED				PART NO.
				ST 3107 PC