


# USB A TYPE MALE RIGHT ANGLE 4 PIN

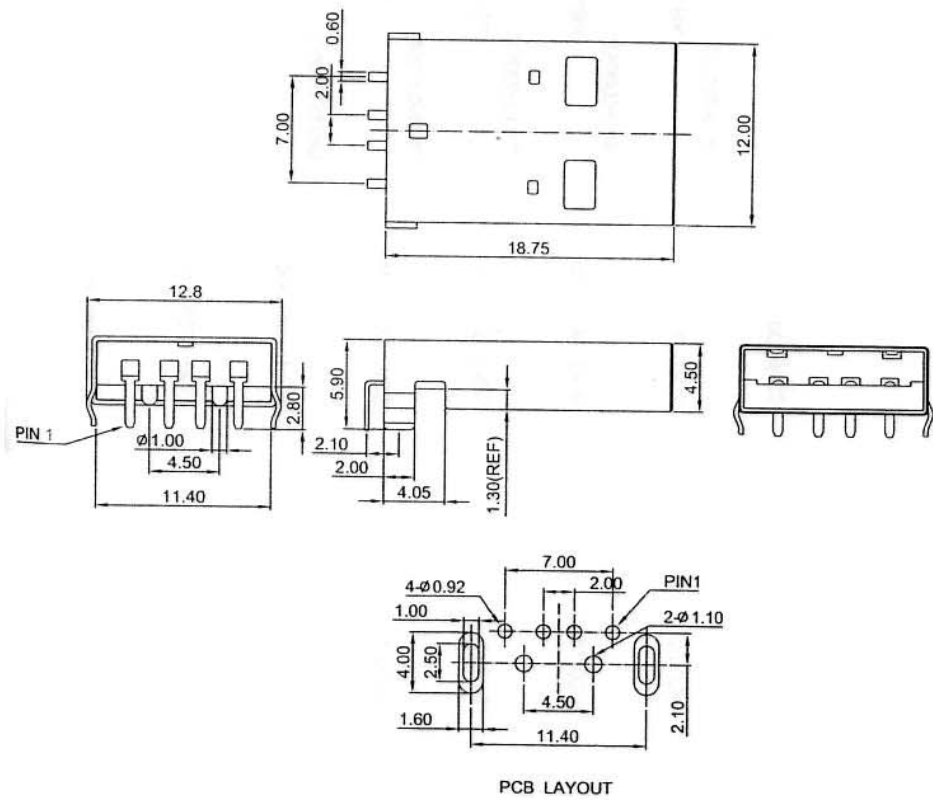

PCB LAYOUT

## SPECIFICATIONS:

CURRENT RATING 1A AC/DC  
 WITHDRAWING VOLTAGE 500V AC/MINUTE  
 INSULATION RESISTANCE 1000M OHM MIN  
 TEMPERATURE RANGE -40C TO +105C  
 CONTACT RESISTANCE 30m OHM MAX

## MATERIAL

SHELL - NICKEL OR TIN PLATED  
 HOUSING - NYLON 6T UL94V-0  
 TERMINAL - PHOSPHOR BRONZE

PACKING  
 1000PCS/BAG

DRAWN BY	DESIGNED BY	UNIT	SCALE	TOLERANCE
		mm		±0.25
CHECKED BY	APPROVED BY	DATE	VER. NO.	
		06-20-01	A	
<b>OWL ELECTRONICS LIMITED</b>				PART NO.
				ST 3204AMD-00