

# USB A TYPE FEMALE RIGHT ANGLE 4 PIN

## SPECIFICATION:




CURRENT RATING: 1A AC/DC  
 WITHSTANDING VOLTAGE: 500V AC/MINUTE  
 INSULATION RESISTANCE: 5000M OHM MIN  
 TEMPERATURE RANGE: -40C TO +105C  
 CONTACT RESISTANCE: 20m OHM MAX

## MATERIAL:

REVISION 1.1  
 SHELL - NICKEL OR TIN PLATED  
 HOUSING - PBT UL94V-0  
 TERMINAL - BRASS, TIN PLATED

REVISION 2.0  
 SHELL - BRASS, NICKEL PLATED  
 HOUSING - NYLON 6T UL94V-0  
 TERMINAL - PHOS. BRONZE, TIN PLATED

PACKING: 1000PCS/BAG

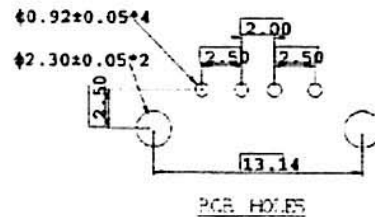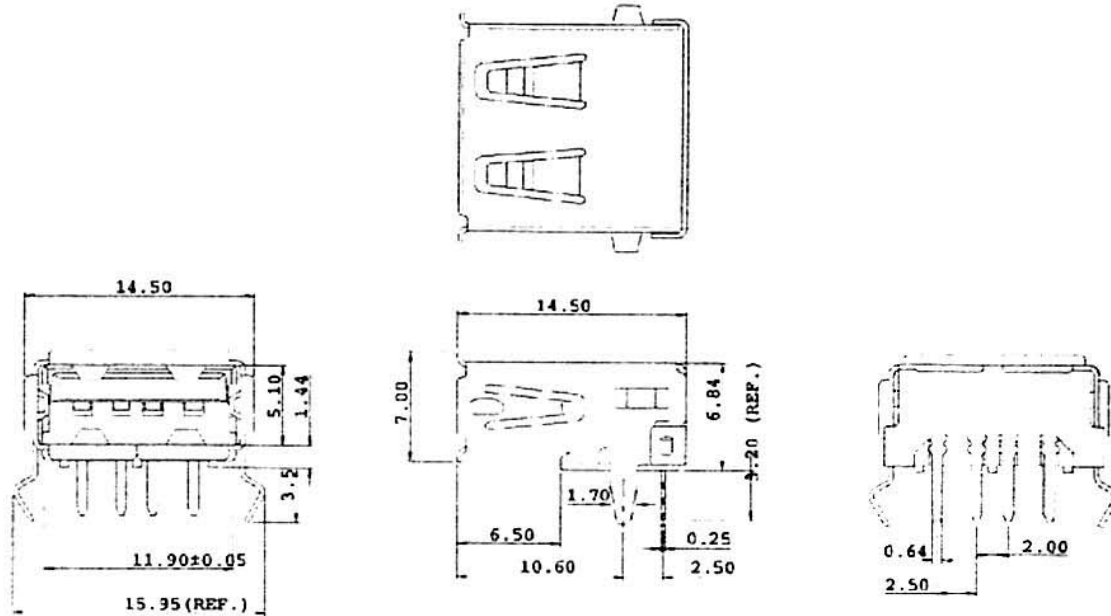

DRAWN BY	DESIGNED BY	UNIT	SCALE	TOLERANCE
		mm		±0.25
CHECKED BY	APPROVED BY	DATE	VER. NO.	
		06-20-01	A	

OWL ELECTRONICS LIMITED

PART NO.

ST 3304AF-01