


USB A TYPE FEMALE STRAIGHT 4 PIN

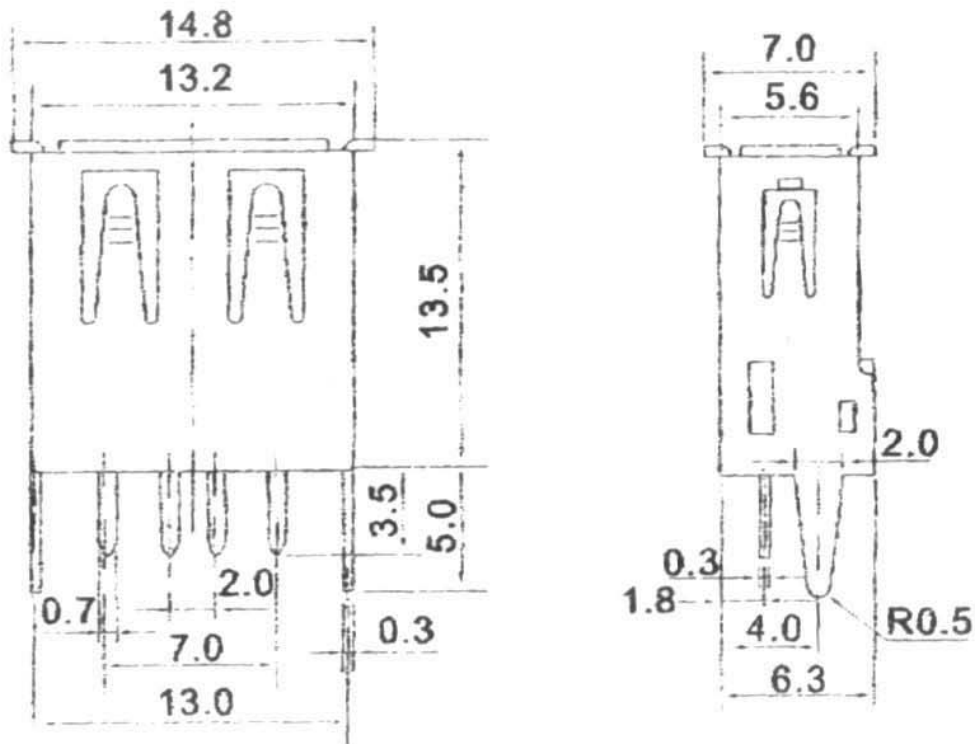

SPECIFICATION:

CURRENT RATING: 1A AC/DC
 WITHSTANDING VOLTAGE: 500V AC/MINUTE
 INSULATION RESISTANCE: 5000M OHM MIN
 TEMPERATURE RANGE: -40C TO +105C
 CONTACT RESISTANCE: 20m OHM MAX

MATERIAL:

REVISION 1.1
 SHELL - NICKEL OR TIN PLATED
 HOUSING - PBT UL94V-0
 TERMINAL - BRASS, TIN PLATED

REVISION 2.0
 SHELL - BRASS, NICKEL PLATED
 HOUSING - NYLON 6T UL94V-0
 TERMINAL - PHOS. BRONZE, TIN PLATED

PACKING: 1000PCS/BAG

DRAWN BY	DESIGNED BY	UNIT	SCALE	TOLERANCE
		mm		±0.25
CHECKED BY	APPROVED BY	DATE	VER NO.	
		06-20-01	A	
OWL ELECTRONICS LIMITED				PART NO.
				ST 3304BF-01