



# BOX HEADER WITH LEVER P=2.54MM

BH 1300S-  
STRAIGHT

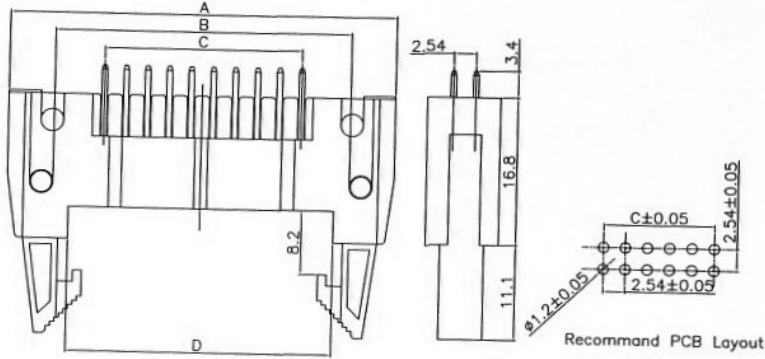

BH 1300R-  
RIGHT ANGLE

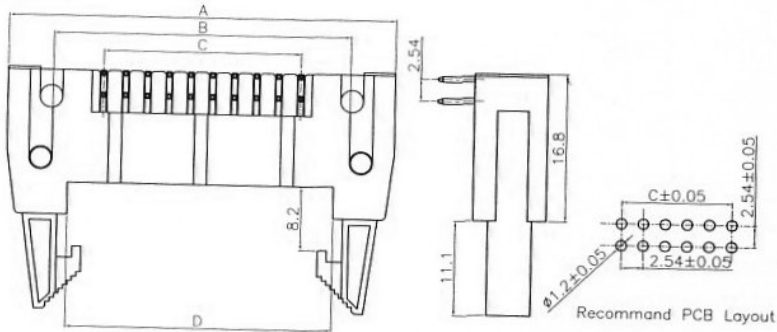

## SPECIFICATIONS

VOLTAGE RATING: 250V AC/DC  
 CURRENT RATING: 3A AC/DC  
 WITHSTANDING VOLTAGE: 1000V AC/MINUTE  
 INSULATION RESISTANCE: 1000M OHM MIN  
 TEMPERATURE RANGE: -40C TO +105C  
 CONTACT RESISTANCE: 20m OHM MAX

## MATERIAL

CONTACT: BRASS, GOLD PLATED  
 BASE: PBT UL94V-0

Poles	Dimensions (mm)			
	A	B	C	D
10	32.00	21.84	10.16	17.96
12	34.45	24.38	12.70	20.50
14	37.08	26.92	15.24	23.04
16	39.62	29.46	17.78	25.58
20	44.70	34.54	22.86	30.33
24	49.78	39.64	27.94	35.74
26	52.32	42.16	30.48	38.28
30	57.40	47.24	35.56	43.68
34	62.48	52.32	40.64	48.44
40	70.10	59.94	48.26	56.06
50	82.80	72.64	60.96	68.76
60	95.80	85.34	73.66	82.00
64	100.90	90.42	78.74	87.10

DRAWN BY	DESIGNED BY	UNIT	SCALE	TOLERANCE
		mm		±0.2MM
CHECKED BY	APPROVED BY	DATE	VER. NO.	
		25 MAR 04		
OWL ELECTRONICS LIMITED				PART NO.
				BH 1300S- BH 1300R-