


FFC CONNECTOR PITCH=2.54MM NON-ZIF DOUBLE CONTACT

STRAIGHT
FF 8081S-

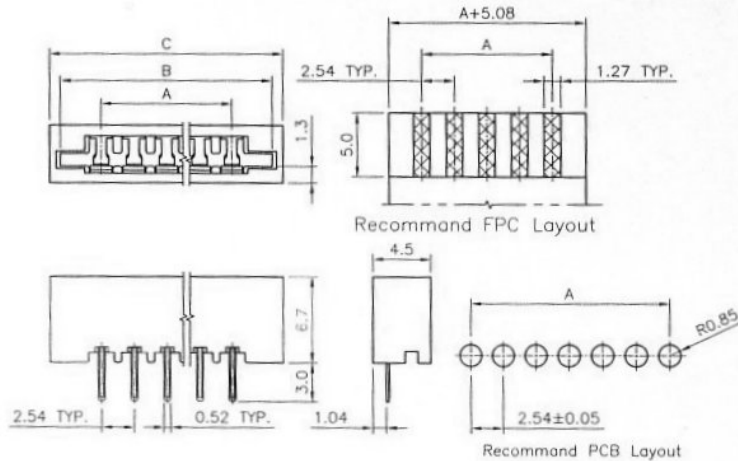

Poles	Dimensions (mm)		
	A	B	C
2	2.54	8.43	10.54
3	5.08	10.97	13.08
4	7.62	13.51	15.62
5	10.16	16.05	18.16
6	12.70	18.59	20.79
7	15.24	21.13	23.24
8	17.78	23.67	25.78
9	20.32	26.21	28.32
10	22.86	28.75	30.86
11	25.40	31.29	33.40
12	27.94	33.83	35.94
13	30.48	36.37	38.48
14	33.02	38.91	41.02
15	35.56	41.45	43.56
16	38.10	43.99	46.10

Poles	Dimensions (mm)		
	A	B	C
17	40.64	46.53	48.64
18	43.18	49.07	51.18
19	45.72	51.60	53.72
20	48.26	54.15	56.26
21	50.80	56.69	58.80
22	53.34	59.23	61.34
23	55.88	61.77	63.88
24	58.42	64.31	66.42
25	60.96	66.85	68.96
26	63.50	69.39	71.50
27	66.04	71.93	74.04
28	68.58	74.47	76.58
29	71.12	77.01	79.12
30	73.66	79.55	81.66


SPECIFICATIONS

VOLTAGE RATING: 125V AC/DC
CURRENT RATING: 1A AC/DC
WITHSTANDING VOLTAGE: 500V AC/MINUTE
INSULATION RESISTANCE: 100M OHM MIN
TEMPERATURE RANGE: -20C TO 85C
CONTACT RESISTANCE: 20m OHM max

MATERIAL

CONTACT: PHOSPHOR BRONZE, TIN PLATED
BASE: PPS UL94V-0

RIGHT ANGLE
FF 8081R-

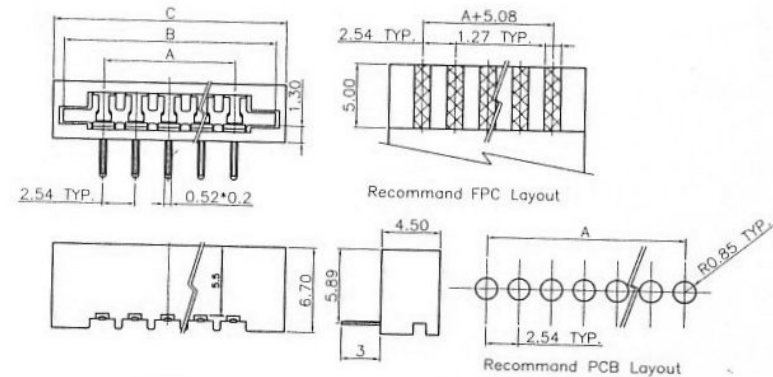

DRAWN BY	DESIGNED BY	UNIT	SCALE	TOLERANCE
		mm		+/- 0.2MM
CHECKED BY	APPROVED BY	DATE	VER NO.	
		25 MAR 04		
OWL ELECTRONICS LIMITED				PART NO.
				FF 8081S FF 8081R