


IC SOCKET (MACHINED) PITCH=2.54MM

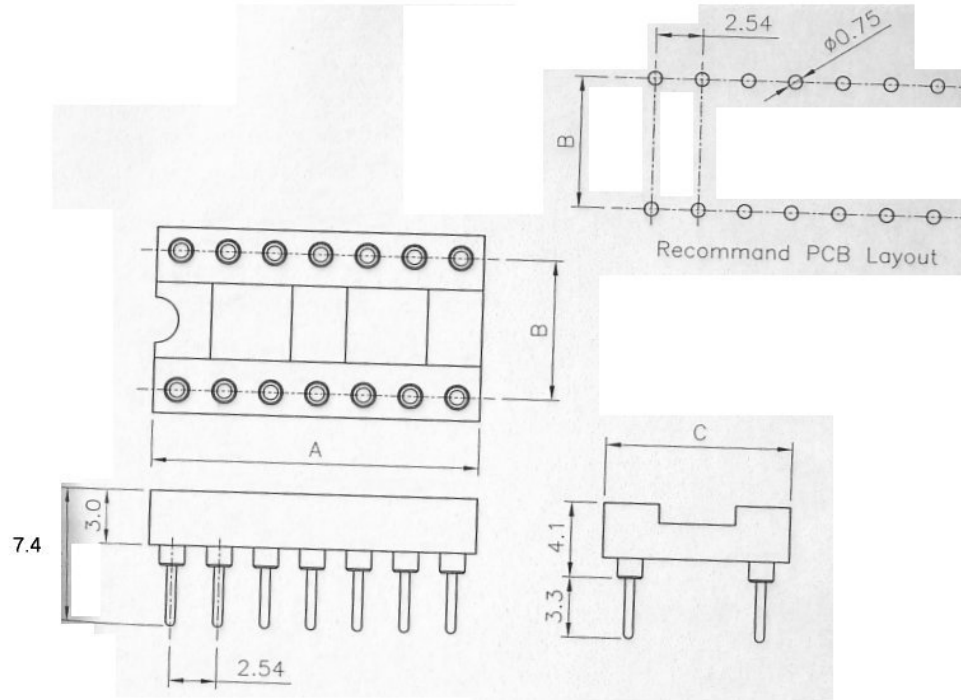

SPECIFICATIONS

- VOLTAGE RATING: 250V AC/DC
- CURRENT RATING: 1A AC/DC
- WITHSTANDING VOLTAGE: 1000V AC/MINUTE
- INSULATION RESISTANCE: 1000M OHM min
- TEMPERATURE RANGE: -40C to +105C
- CONTACT RESISTANCE: 20m OHM max

MATERIAL

- CONTACT: PHOSPHOR BRONZE TIN PLATED
- BASE: PBT UL94V-0

POLES	Dimensions (mm)		
	A	B	C
6	7.62	7.62	10.16
8	10.16	7.62	10.16
14	17.78	7.62	10.16
16	20.32	7.62	10.16
18	22.86	7.62	10.16
20	25.40	7.62	10.16
22	27.94	7.62	10.16
24	30.48	7.62	10.16
28	35.56	7.62	10.16
32	40.64	15.24	17.78
40	50.80	15.24	17.78
42	53.34	15.24	17.78
48	60.96	15.24	17.78

DRAWN BY	DESIGNED BY	UNIT	SCALE	TOLERANCE
		mm		±0.25
CHECKED BY	APPROVED BY	DATE	VER NO.	
		06-20-01	A	
OWL ELECTRONICS LIMITED				PART NO.
				IC 3500