



### PIN HEADER PITCH=2.54MM SINGLE ROW

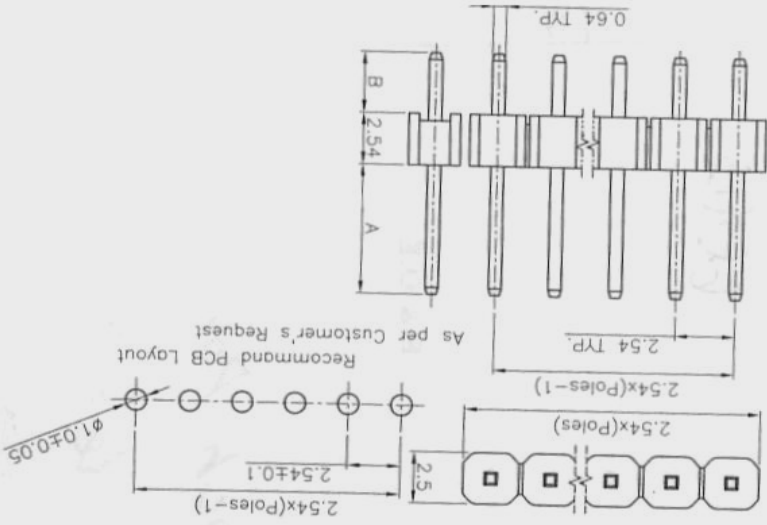

SINGLE ROW  
STRAIGHT  
PH 3001S-

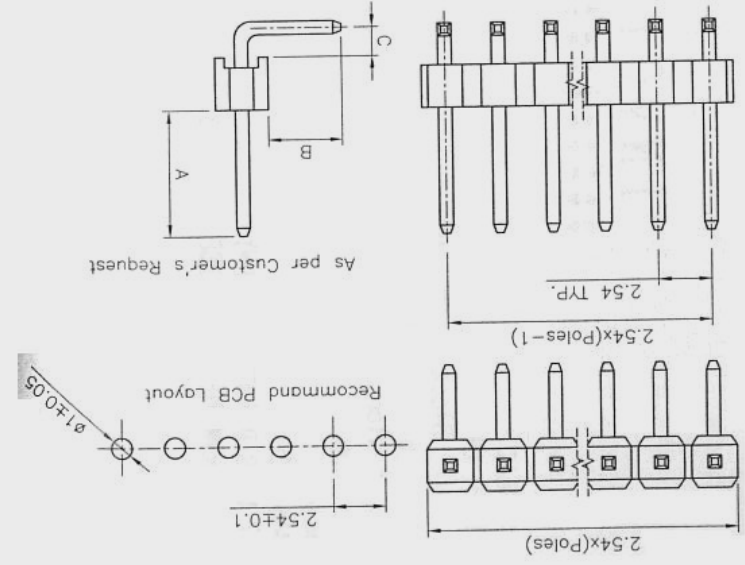

SINGLE ROW  
RIGHT ANGLE  
PH 3001R-

### SPECIFICATIONS

VOLTAGE RATING: 250V AC/DC  
 CURRENT RATING: 3A AC/DC  
 WITHSTANDING VOLTAGE: 1000V AC/MINUTES  
 INSULATION RESISTANCE: 1000M OHM MIN  
 TEMPERATURE RANGE: -25C TO + 85C  
 CONTACT RESISTANCE: 20m OHM MAX  
 MATERIAL  
 CONTACT: BRASS, GOLD PLATED  
 BASE: PBT UL94V-0

DRAWN BY	DESIGNED BY	UNIT	SCALE	TOLERANCE
CHECKED BY	APPROVED BY	DATE	25 MAR 04	
		VER NO.		
		mm		
				+/- 0.2MM
				PART NO.
				PH 3001S- PH 3001R-
OWL ELECTRONICS LIMITED				