



# PCB SOCKET P=2.0MM DOUBLE ROW

DOUBLE ROW  
STRAIGHT  
PS 2700S-

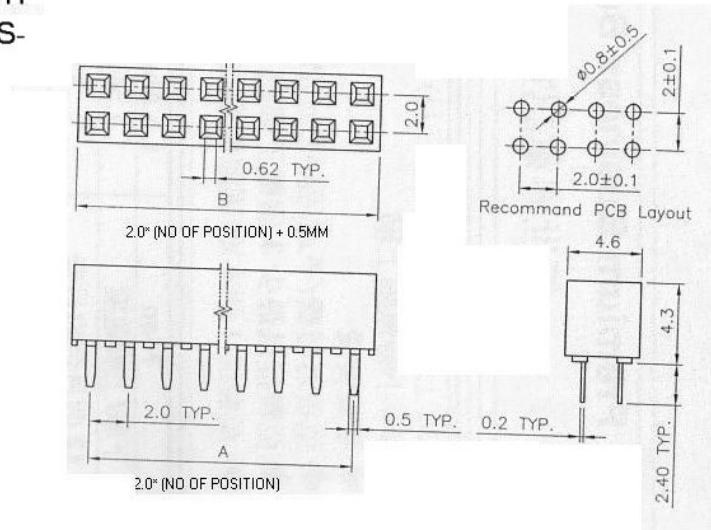

DOUBLE ROW  
RIGHT ANGLE  
PS 2700R-

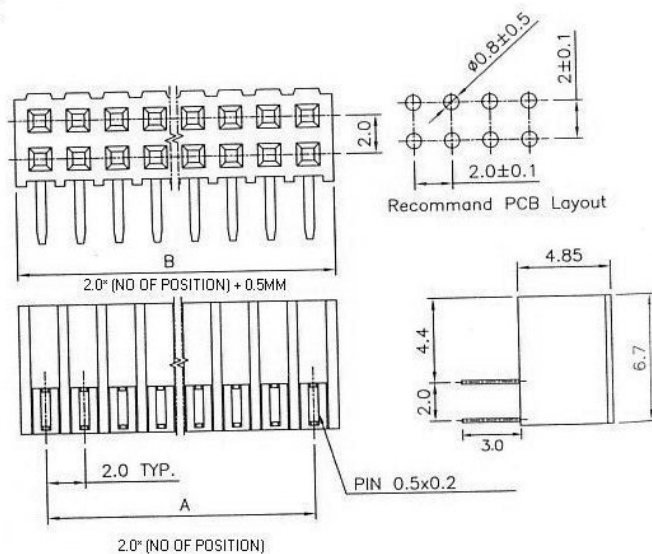


## SPECIFICATIONS:

CURRENT RATING: 1A AC/DC  
WITHSTANDING VOLTAGE: 500V AC/MINUTE  
INSULATION RESISTANCE: 5000M OHM MIN  
TEMPERATURE RANGE: -40C TO 105C  
CONTACT RESISTANCE: 20M OHM MAX

## MATERIAL

CONTACT: PHOSPHOR BRONZE GOLD PLATED  
BASE: PBT UL94V-0

DOUBLE ROW  
SMT  
PS 2700V-

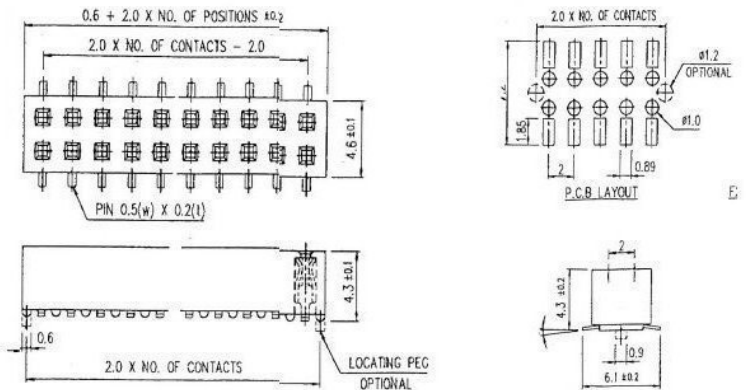

DRAWN BY	DESIGNED BY	UNIT	SCALE	TOLERANCE
		mm		+/- 0.2MM
CHECKED BY	APPROVED BY	DATE	VER NO.	
		25 MAR 04		
OWL ELECTRONICS LIMITED				PART NO.
				PS 2700S- PS 2700R- PS 2700V-